


線位表

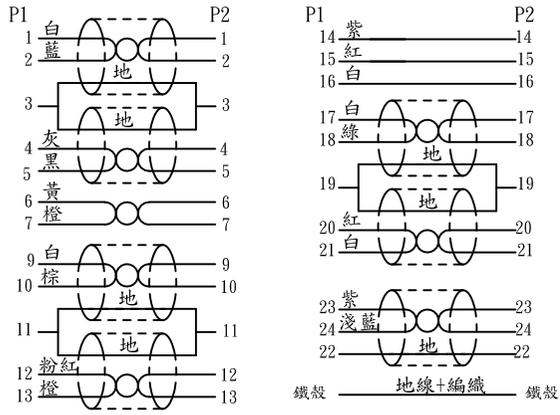


NOTE:

- 1. 100%OPEN, SHORT & MISWIRE TEST.
- 2. PAY ATTENTION TO PIN ASSIGNMENTS.

TOLERANCES			REVISIONS				COMPONENT NO :		Arvanics Corporation.		
REV	DESCRIPTION	DATE	APPVD.	DVIP/DVIP-D05BK	APPROVED :	TITLE :CABLE ASS' Y					
X . +	mm					REQUIRED DOCUMENTS : *					
X . X +	mm					SCALE : 1 : 1					
X . XX +	mm					SHELLT : 1 / 1					
X . XXX +	mm					REV : 1					
METRIC (mm)						DRAWING :					
						FILE :					
						THIRD ANGLE PROJECTION					

NO	DESCRIPTION	MATERIAL
1	CABLE	UL/CSA 20276 (30AWG*1P+EAM)*7+30AWG*1P+30AWG*3C +AEB(AL) 85% OD:7.0mm CLR-006 BLACK ABS 500g 60°C 48H
2	CONNECTOR	DVI (24+1) MALE PBT BLACK PIN G/F
3	SHELL	DVI SHELL PLATED TIN
4	CASE SHELL	DVI 馬口鐵 一體式含後鐵殼 ID:8.5mm 材質:鐵鍍鎳
5	PVC	SHORE A 88±2 COLOR:BLACK CLR-006
6	TUBE	UL/CSA 125°C VW-1 (F4) 300V φ 1.0mm BLACK
7	TUBE	UL/CSA 125°C VW-1 (F4) 300V φ 2.5mm BLACK
8	DUST COVER	PE CLEAR
9	SCREW	SCREW 2.8*31.5mm#4-40 ABS MOLDED COLOR:BLACK CLR-006
10	COPPER-FOIL	W8*T0.04mm
11	CORE	B29 RH 14.2*28.5*8.0mm

TOLERANCES			REVISIONS				COMPONENT NO : DVIP/DVIP-D05BK		Arvanics Corporation.	
	REV	DESCRIPTION	DATE	APPVD.	APPROVED :	TITLE : CABLE ASS'Y				
X . + mm						REQUIRED DOCUMENTS : *				
X . X + mm						SCALE : /	SHELLT:2/2	REV:1		
X . XX + mm						DRAWN :	DRAWING :		THIRD ANGLE PROJECTION 	
X . XXX + mm						DATE :	FILE :			
METRIC (mm)										