


ROHS-COMPLIANT

LTR	REV.	DESCRIPTION	DATE
	A	NEW VER	20/07/16'

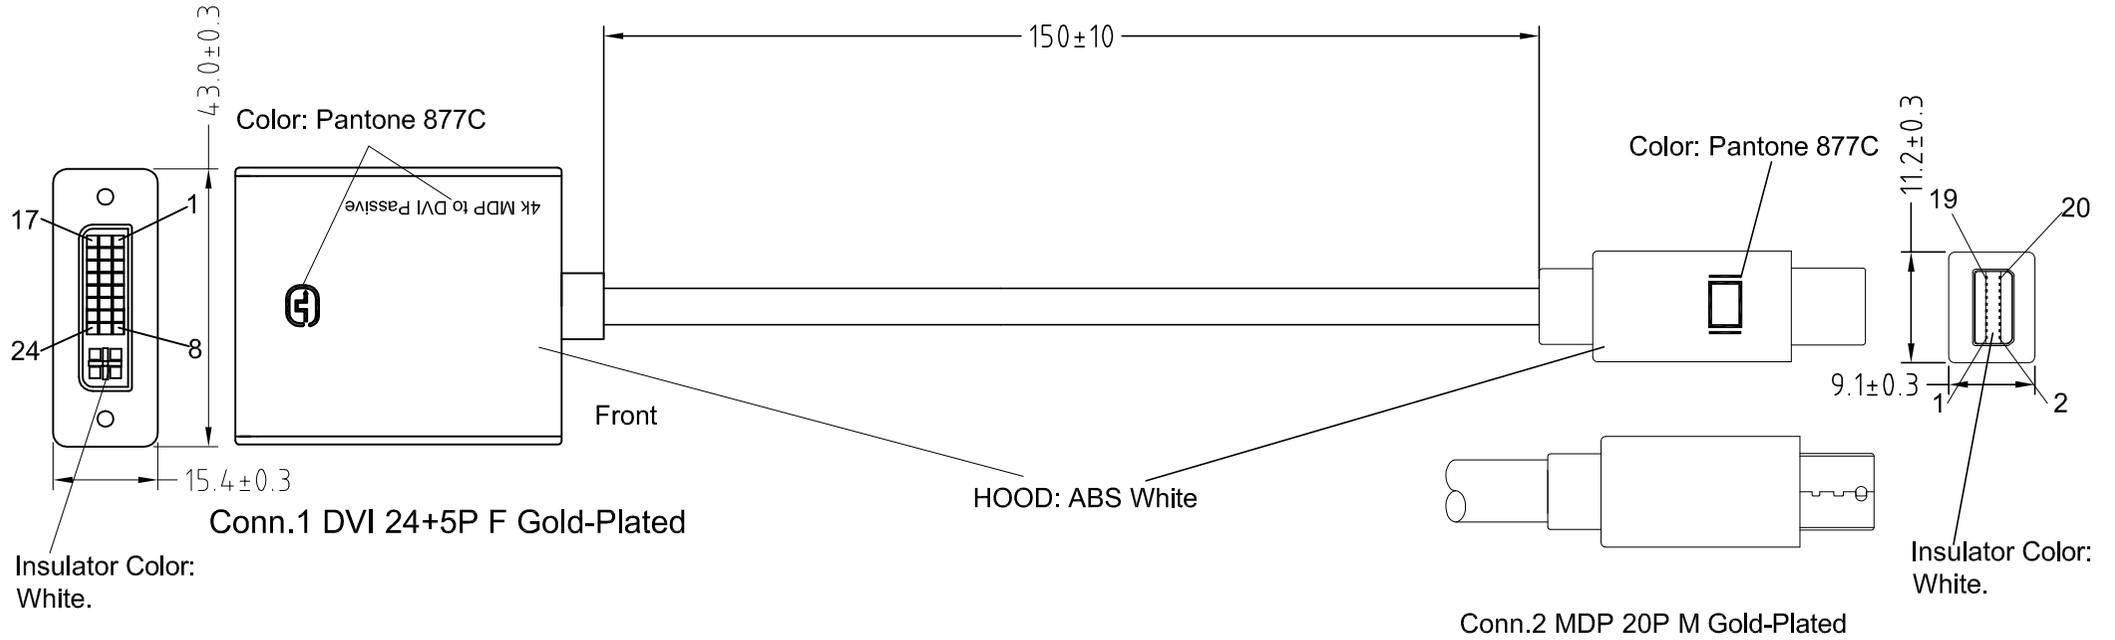

Features:

1. Compliant to the VESA DisplayPort Standard.
2. Supports DisplayPortTM1, 2 and 4 lanes.
3. Supports full link training, fast link training and no link training.
4. HDMI 1.4 compliant with maximum data rate 3.0Gbps.
5. Content protection of HDCP 1.3 for DisplayPortTM and HDMI/DVI.
6. Supports 4k*2k and 1080p Stereo 3D HDMI formats.
7. Low power consumption.
8. Housing Colour: White.


PACKING:

Each PC / ZIPBAG.

Tolerance Inch mm			Arvanics Corporation					
.X	.015	.30					Title NDP-DVI-0015K	
.XX	.010	.10						
.XXX	.005	.05	Customer P/N:					
Draw 20/07/16			App'd _____ Customer: _____					
Check			Scale	NONE	Units	m/m	Third Angle Projection	
Engr			Dwg No.		REV: A	Sheet	1/2	

ROHS-COMPLIANT


LTR	REV.	DESCRIPTION	DATE
	A	NEW VER	20/07/16'

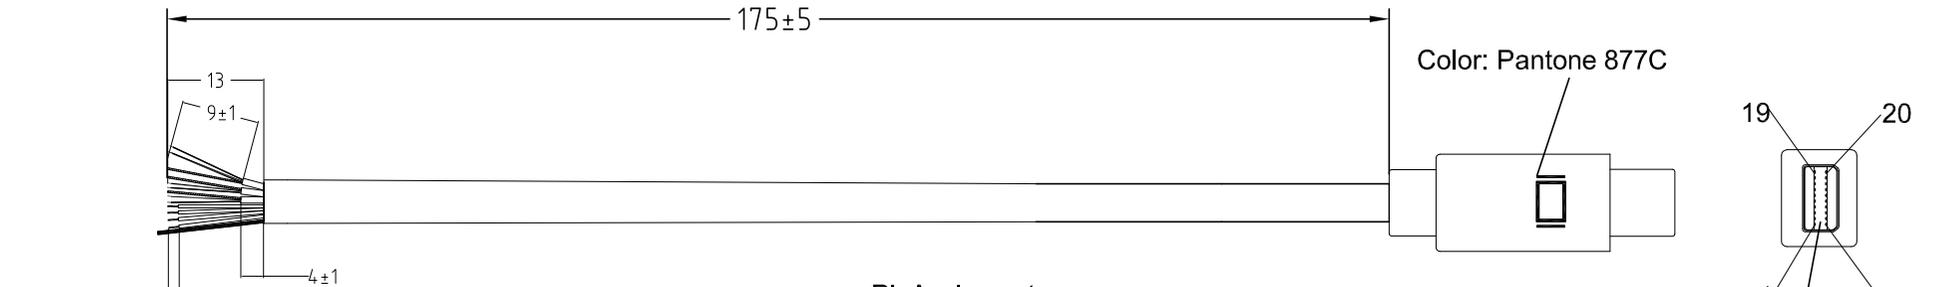

Color: Pantone 877C

T.C:1.8-2.3

Conn.1 OPEN

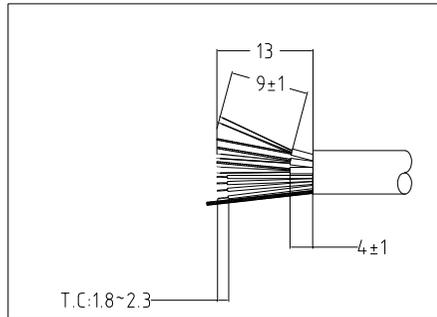

PinAssignment

Conn.1	Conn.2
Open	GND 1
Open	3 WHITE
Open	5 RED
Open	GND 7
Open	9 WHITE
Open	11 GREEN
Open	GND 13
Open	15 WHITE
Open	17 BLUE
Open	19 GREEN
Open	2 PURPLE
Open	4 YELLOW
Open	6 WHITE
Open	GND 8
Open	10 WHITE
Open	12 BLACK
Open	GND 14
Open	16 WHITE
Open	18 BROWN
Open	20 RED
SHELL	SHELL

Conn.2 MDP 20P M Gold-Plated

Insulator Color: White.

NOTE:

- CABLE:
UL20276[(32AWG+D+AL/MYLAR)*5P+32AWG*4C+
28AWG*1C+ AL+D(7/0.08BC)+B(16/7/0.12TC) PVC
JACKED OD: 5.0mm ,Color: White.
- CONNECTOR:
CONN.2: MINI DISPLAYPORT MALE CONTACT: G/F SHELL: Gold-PLATED
- TEST REQUEST:
 - 100% OPEN SHORT & MIS-WIRE TEST.
 - CONTACT RESISTANCE 3 ohm MAX.
 - INSULATION RESISTANCE 10M ohm MIN.

Tolerance	Inch	mm
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05

Draw
20/07/16

Check

Engr

Arvanics Corporation			
Title NDP-DVI-0015K			
Customer P/N:			
App'd		Customer:	
Scale	NONE	Units	m/m
			Third Angle Projection
Dwg No.		REV: A	Sheet 2/2